




## *Always ready...*

Apollo power supplies take the guess work out of choosing a safe, reliable source of power for your Access Control System. Designed with flexibility in mind, installers will appreciate the wide range of mounting options along with easy power connections from Apollo's specially designed Power Distribution Board. Ten available power output terminals make it easy to supply power to Apollo system devices and readers as well as magnetic locks and electric strikes. Equipped with a 12 amp-hour battery, backup power can be provided to all your devices to maintain continuous operation even in the case of AC power loss.

- *Auto-sensing variable input (100-240VAC)*
- *10-position power distribution board*
- *Tamper switch*
- *LED power status indicators*
- *Durable 18-gauge steel*
- *Factory pre-wired*
- *Fused outputs protect equipment*
- *Flexible mounting options*
- *12 Amp Hr sealed lead battery*

# Specifications

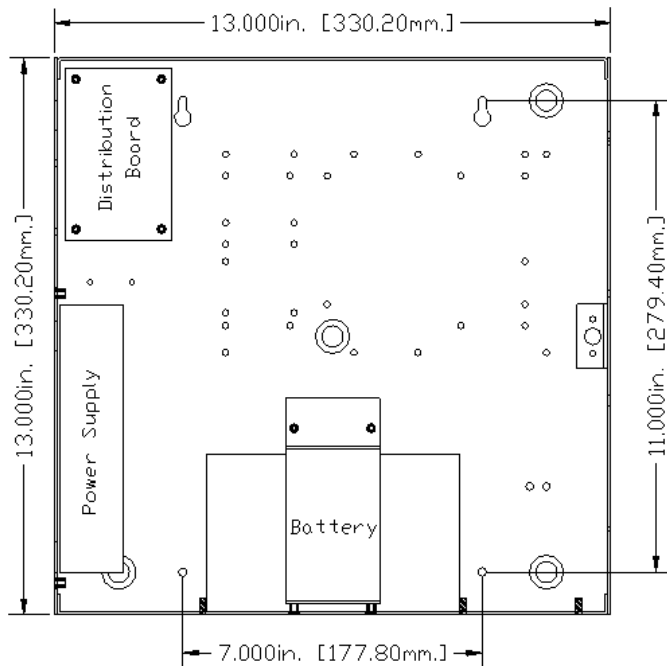

## AUS-1204


### Specifications:

- Input: 100-240VAC 1.6A 50/60Hz
- DC Output: 13.8VDC 3.8A  
(5V 0.75A via Power Distribution Board)
- Battery Charge Output: 13.4VDC 0.23A
- Additional: AC Power Fail Output
- Dimensions: 13" x 13" x 4.5" (33.02 x 33.02 x 11.43 cm)
- Construction: Cold-rolled 18 Gauge Steel, Powder Coated Finish

## APU-1210

### Specifications:

- Input: 100-240VAC 2.5A 50/60Hz
- DC Output: 13.8VDC 10.5A  
(5V 0.75A via Power Distribution Board)
- Battery Charge Output: 13.3VDC 0.5A
- Dimensions: 18" x 16" x 5" (45.7 x 40.6 x 12.7 cm)
- Construction: Cold-rolled 18 Gauge Steel, Powder Coated Finish

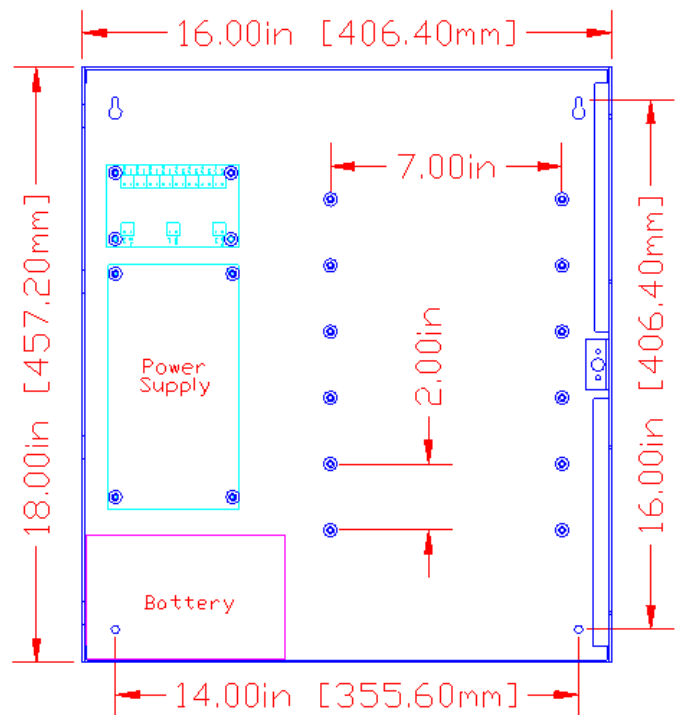

Model	Part Number	Description
AUS-1204	460-400R	12 Volt DC, 4 Amp UPS Power Supply with APE-15 Enclosure and Battery
AUS-1204NB	460-400RNB	AUS-1204 without battery
APU-1210	460-110R	12 Volt DC, 10.5 Amp UPS Power Supply with Enclosure and Battery
APU-1210NB	460-110RNB	APU-1210 without battery

3610 Birch Street  
Newport Beach, CA 92660-2619, USA  
Tel: +1 949 852 8178 Fax: +1 949 852 8172  
www.apollo-security.com

