

APN-35

The APN-35 is a 2-door access controller that can also be used for a single door with in/ out readers for anti-pass back and simple time and attendance. Used in conjunction with the ASW-35 software, up to 4 APN-35s can be daisy chained together to form an 8-door system.

The APN-35 supports standard proximity readers and other readers with Wiegand or ABA track 2 output.

All the door configuration and cardholders' information are stored locally in the independent APN-35 and time zones, access levels, holidays and PINs integrity are maintained even when the APN is not connected to the PC.

An on-board battery backed real time clock stamps events as they occur. The APN-35 stores up to 3750 events in its buffer for later recall for processing of reports by the ASW-35.


The APN-35 is an effective and economical solution for a small office, built with unquestionable Apollo's quality.

APN-35 Features:

- SMT construction.
- Flash memory.
- 1 or 2 door operation.
- 2000 sequential/random cards/PINs.
- 10 time zones, 8 access levels, 40 holidays per controller.
- Time zone reader mode control.
- Time zone alarm input masking.
- Up to 3750 local events storage.
- Real time battery backed clock.
- 2 auxiliary inputs.
- Hard/soft anti-pass back.
- Card, Card & PIN, Card or PIN, Locked/ Unlocked or Facility Code operation modes. Secondary passcode for output control.
- Tamper input.



APN-35 2 Door Controller

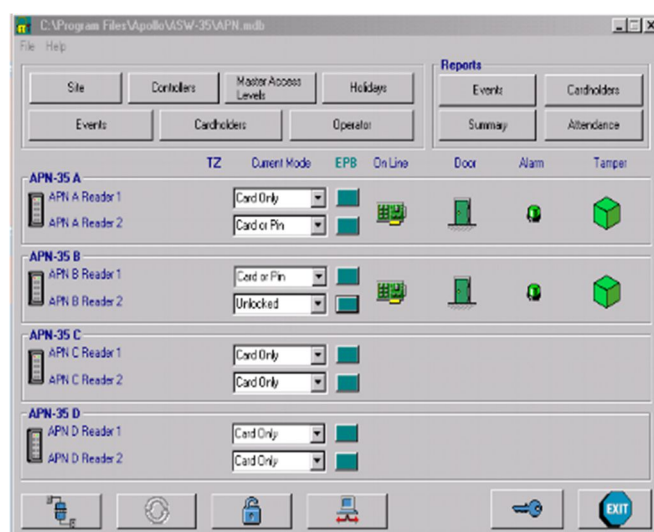


ASW-35 Management Program

- Up to 4 APN-35 controller PER site.
- Real time reader mode display and control.
- Real time events display.
- Selective event reporting.
- Simple time and attendance reports.
- Access summary reports.
- Creates Master Access Level for virtually un-limited access levels configuration.
- Clear, concise and filtered reports for review.

SPECIFICATIONS

Power Requirement	12 VDC to 14 VDC	
Normal/Max Current Consumption	150mA / 500mA	
Reader Status LEDs	Red, Green	
Operating Temperature	-25 to +65 Degrees Celsius (-13 to 149 Degrees F.)	
Relative Humidity	90% Max, operating, non-condensing	
Dimensions	130mm x 90 mm x 14mm	
Compliance	UL, CE, RoHS Compliant	
Ordering Information	# 482-035	# 482-235
	APN-35-485	APN-35-232

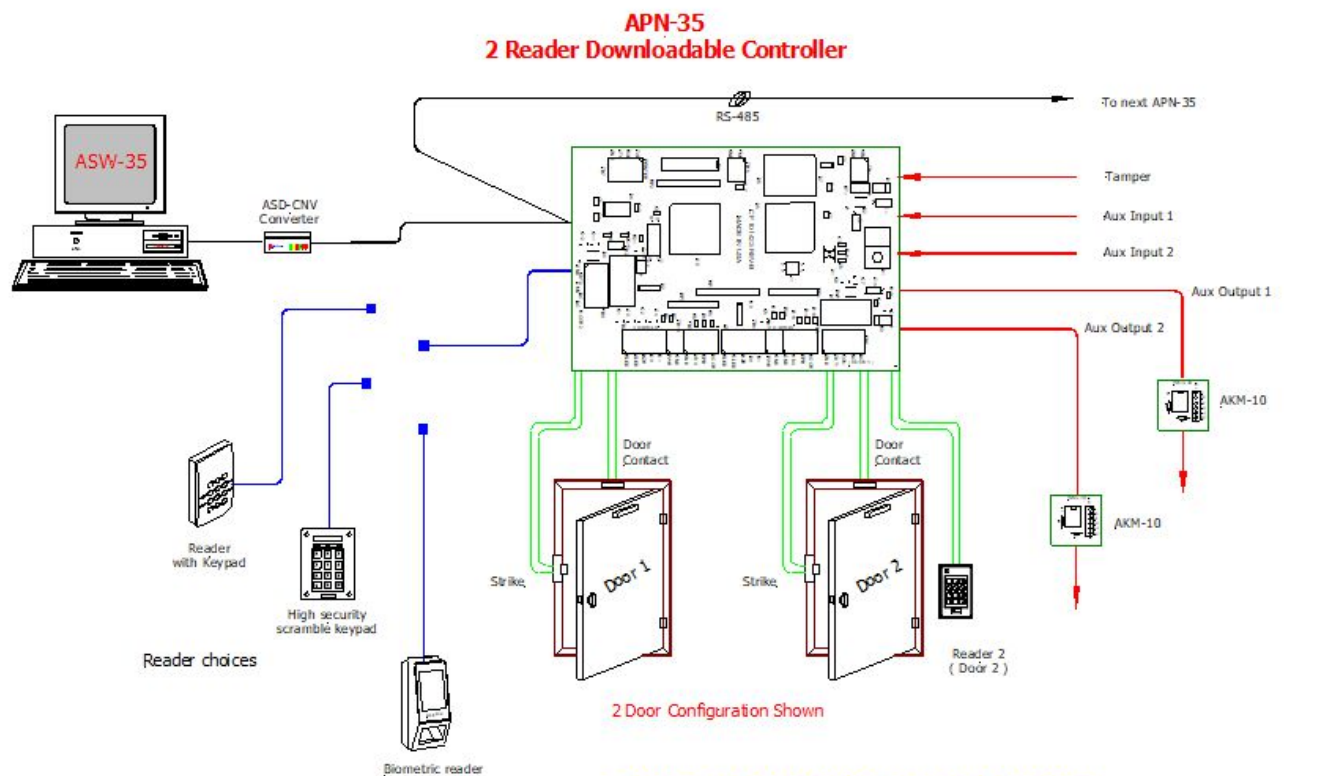

- * Complete standalone operation
- * Configurable, up to 3750 events storage
- * Real time clock with battery back up
- * 10 Programmable time zones with 2 intervals each
- * 8 Access levels per APN
- * 40 Holidays
- * Date, time stamped events as they occur

- * Monitor and reports reader tamper and door alarm
- * Output for strike and auxiliary use
- * Non-volatile memory for up to 3750 sequential/random cards/PINs
- * Anti-passback
- * Card only / Card + PIN / Card or PIN / Facility / Lock / Unlock reader mode
- * Time zone reader mode/aux output control
- * Attendance reporting
- * Up to 4 APN-35 to form an 8 door system

Smarter Security Solutions

Please contact your local Apollo office representative or your dealer for more information on this product.