




Always ready...

Apollo power supplies take the guess work out of choosing a safe, reliable source of power for your Access Control System. Designed with flexibility in mind, installers will appreciate the wide range of mounting options along with easy power connections from Apollo's specially designed Power Distribution Board. Ten available power output terminals make it easy to supply power to Apollo system devices and readers as well as magnetic locks and electric strikes. Equipped with a 12 amp-hour battery, backup power can be provided to all your devices to maintain continuous operation even in the case of AC power loss.

- *Auto-sensing variable input (100-240VAC)*
- *10-position power distribution board*
- *Tamper switch*
- *LED power status indicators*
- *Durable 18-gauge steel*
- *Factory pre-wired*
- *Fused outputs protect equipment*
- *Flexible mounting options*
- *12 Amp Hr sealed lead battery*

Specifications

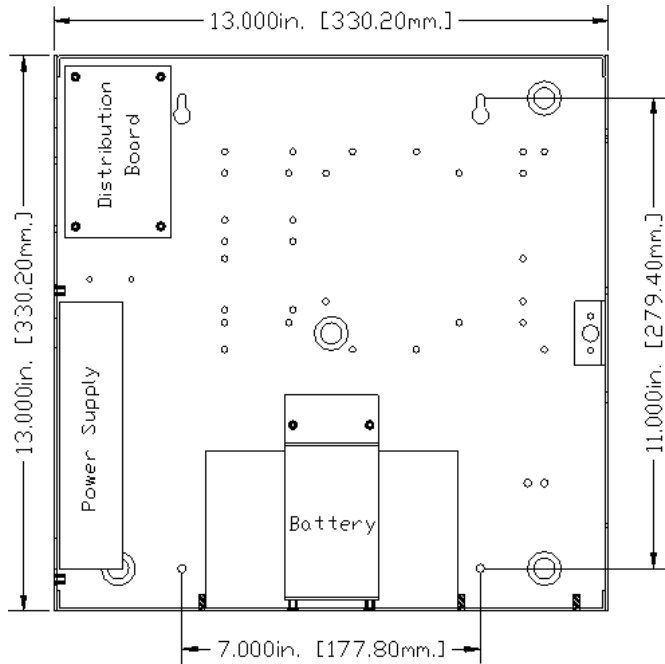

AUS-1204


Specifications:

Input: 100-240VAC 1.6A 50/60Hz
 DC Output: 13.8VDC 3.5A
 (5V 0.75A via Power Distribution Board)
 Battery Charge Output: 13.4VDC 0.23A
 Dimensions: 13" x 13" x 5" (33.02 x 33.02 x 12.7cm)
 Construction: Cold-rolled 18 Gauge Steel, Powder Coated Finish

APU-1210

Specifications:

Input: 100-240VAC 2.5A 50/60Hz
 DC Output: 13.8VDC 10.5A
 (5V 0.75A via Power Distribution Board)
 Battery Charge Output: 13.3VDC 0.5A
 Dimensions: 18" x 16" x 4.5" (45.7 x 40.6 x 11.43 cm)
 Construction: Cold-rolled 18 Gauge Steel, Powder Coated Finish

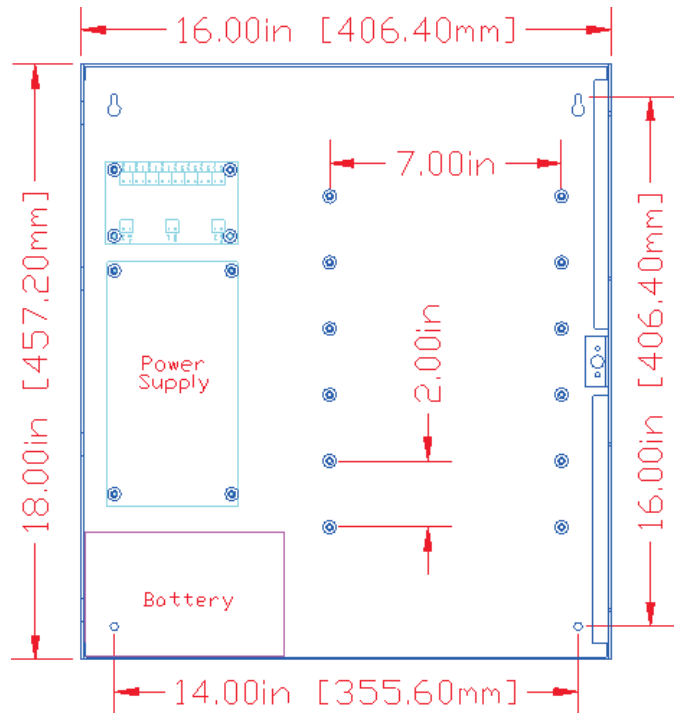

Model	Part Number	Description
AUS-1204	460401R	12 Volt DC, 3.5 Amp UPS Power Supply with APE-15 Enclosure and Battery
AUS-1204NB	460401RNB	AUS-1204 without battery
APU-1210	460110R	12 Volt DC, 10.5 Amp UPS Power Supply with APE-30 Enclosure and Battery
APU-1210NB	460110RNB	APU-1210 without battery

3610 Birch Street
 Newport Beach, CA 92660-2619, USA
 Tel: +1 949 852 8178 Fax: +1 949 852 8172
 www.apollo-security.com

